FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

6700 Self-Propelled Sprayer

CAB

FRESH AIR FILTER, HEAVY DUTY – RE67830

FRESH AIR FILTER, STANDARD – RE12793

up to serial no. 5999

Replace every 500 hours or annally, whichever comes first.



CAB

ACTIVATED CARBON FILTER KIT – AN206280

From serial no. 6000

Do NOT clean dry or wet. Replace every 500 hours or once every year, whichever comes first, and as required.



CAB

RECIRCULATION AIR FILTER – AH92463

up to serial no. 5999

Replace every 500 hours or annually, whichever comes first.

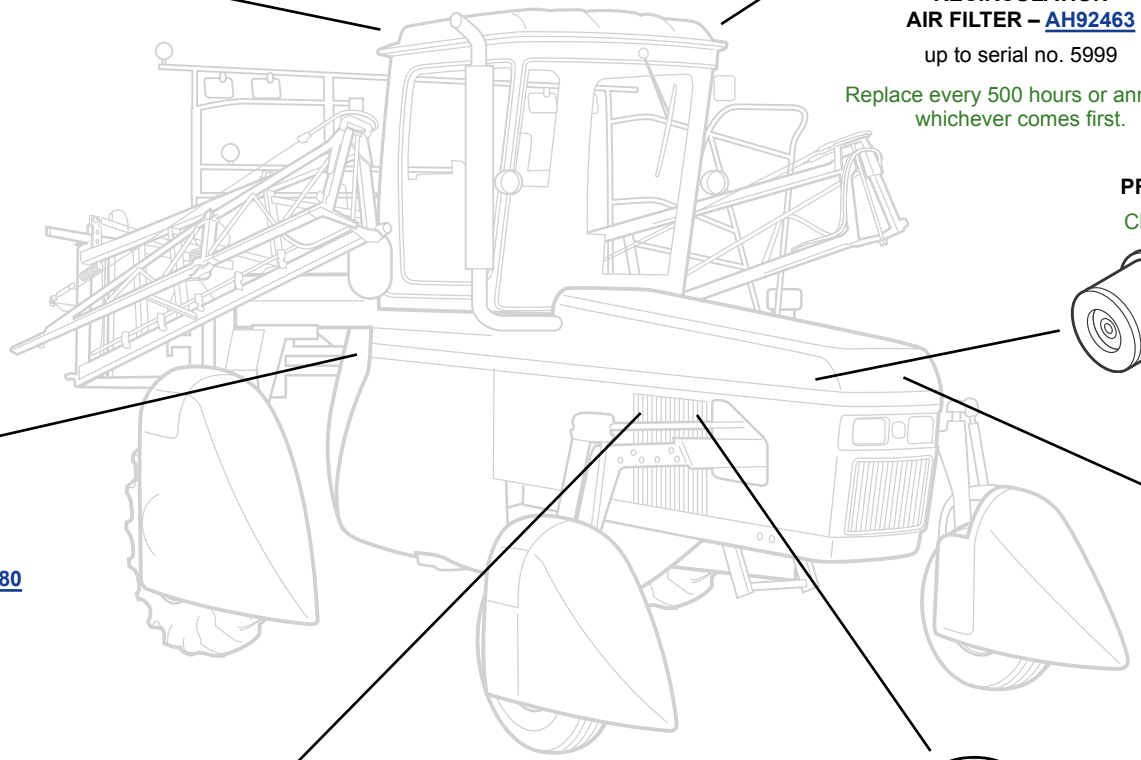

ENGINE

PRIMARY AIR FILTER – AT44377

Clean every 50 hours and replace as required.

HYDRAULICS

HYDRAULIC FILTER – RE17380

Replace after 400 hours.

(Click here for **capacity**)

ENGINE

SECONDARY AIR FILTER – AT44378

Do NOT clean.
Change only with primaryair filter.



ENGINE

FUEL FILTER EXTENDED LIFE – RE62419

NORMAL STANDARD – RE60021

Replace every one year.

ENGINE

OIL FILTER – RE59754

Replace after 100 hours and then every 200 hours.

If John Deere Plus-50™ engine oil and a John Deere filter are used, the oil and filter service interval may be extended 50 percent, up to 500 hours.

(Click here for **capacity**)



JOHN DEERE
Genuine Parts and Service

July 2010. Subject to change without notice.

http://www.deere.com/en_US/parts/servicessupport/filteroverviews.html

CAPACITIES
6700 Self-Propelled Sprayer

CAPACITIES (Approximate):

Fuel Tank:

6700 ..... 170 L (45 gal)

Cooling System with Heater:

6700 ..... 19 L (20 qt)

Crankcase including Filter:

6700 ..... 14.7 L (15.5 qt)

Hydraulic Reservoir (Full to Sight Glass):

6700 ..... 34.5 L (9.12 gal)

Hydraulic System:

6700 ..... 45.4 L (12 gal)

Final Drives (Each Side):

6700 ..... 2 L (67 oz)

Return to Filter Overview